


DUNLOP

DP-22E16D0T-IT5F HD 1080p EXIR Bullet Camera

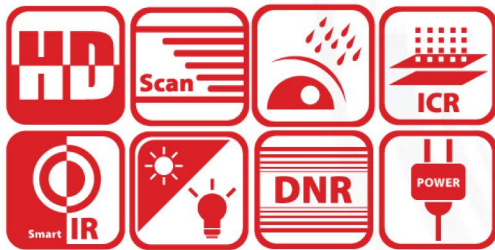

Key Features

- 2 megapixel high performance CMOS
- Analog HD output, up to 1080p resolution
- Day/Night switch
- Smart IR
- Up to 80 m IR distance
- Switchable TVI/AHD/CVI/CVBS
- IP66

Specifications

Camera	
Image Sensor	2MP CMOS image sensor
Signal System	PAL/NTSC
Effective Pixels	1920 (H) × 1080 (V)
Min. illumination	0.01 Lux@(F1.2,AGC ON), 0 Lux with IR
Shutter Time	1/25 (1/30) s to 1/50,000 s
Lens	3.6 mm (6 mm, 8 mm, 12 mm, 16mm optional)
	Field of view: 82.2°(3.6 mm), 54°(6 mm), 37.7°(8 mm), 24.2°(3.6 mm), 18.8°(6 mm)
Lens Mount	M12
Day & Night	ICR
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 180°, Rotation: 0° to 360°
Synchronization	Internal synchronization
Video Frame Rate	1080p@25fps/1080p@30fps
HD Video Output	1 analog HD output
S/N Ratio	>62 dB
General	
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), Humidity: 90% or less (non-condensation)
Power Supply	12 V DC ± 15%
Power Consumption	Max. 6 W
Protection Level	IP66
IR Range	Up to 80 m
Dimensions	86.7 mm × 81.6 mm × 226 mm(3.4" × 3.2" × 8.9")
Weight	430 g (0.95 lb.)