

## DS-K1T671TMFW Face Recognition Terminal



- Forced mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance will be failed
- Face mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance is valid
- 7-inch LCD touch screen, 2 Mega pixel wide-angle lens, built-in Mifare card reading module
- Face recognition distance (without face mask): 0.3 m to 3 m, Duration < 0.2 s/User, Accuracy rate ≥ 99%
- Max. 50,000 faces capacity, Max. 5000 fingerprints capacity, and Max. 50,000 cards
- Two-way audio with client software, indoor station, and main station
- Supports TCP/IP, Wi-Fi
- Configuration via the web client
- Supports ISAPI and ISUP5.0 protocol
- IP65



## ▪ Specification


| System                         |   |
|--------------------------------|---|
| Operation system               | Linux                                   |
| Display                        |   |
| Dimensions                     | 7-inch                                  |
| Type                           | LCD                                     |
| Operation method               | Capacitive touch screen                 |
| Video                          |   |
| Pixel                          | 2 MP                                    |
| Lens                           | 2                                       |
| Audio                          |   |
| Tone quality                   | Noise suppression and echo cancellation |
| Network                        |   |
| Wired network                  | 10 M/100 M/1000 M self-adaptive         |
| Wi-Fi                          | Support                                 |
| Interface                      |   |
| Network interface              | 1                                       |
| RS-485                         | 1                                       |
| Wiegand                        | 1                                       |
| Lock output                    | 1                                       |
| Exit button                    | 1                                       |
| Door contact input             | 1                                       |
| IO input                       | 2                                       |
| IO output                      | 1                                       |
| Power interface                | 2-pin                                   |
| TAMPER                         | 1                                       |
| USB                            | 2                                       |
| Capacity                       |   |
| Card capacity                  | 50,000                                  |
| Face capacity                  | 50,000                                  |
| Fingerprint capacity           | 5000                                    |
| Event capacity                 | 100,000                                 |
| Authentication                 |   |
| Card type                      | Mifare 1 card                           |
| Card reading frequency         | 13.56 MHz                               |
| Card reading distance          | 0 to 5 cm                               |
| Face recognition duration      | < 0.2 s per person                      |
| Face recognition accuracy rate | ≥ 99%                                   |
| Face recognition distance      | 0.3 to 3 m (Without face mask)          |
| Function                       |   |
| QR code recognition            | Support                                 |
| Face anti-spoofing             | Support                                 |
| Advertisement                  | Support                                 |
| Audio prompt                   | Support                                 |

|                      |  |
|----------------------|--|
| Time synchronization | Support  |
| <b>General</b>       |  |
| Power supply method  | 2 pin connector  |
| Power supply         | 12 VDC/ 2 A  |
| Working temperature  | -30 °C to 60 °C (-22 °F to 140 °F)   |
| Working humidity     | 10 to 90% (No condensing)  |
| Dimensions           | 290 mm × 116.5 mm × 33 mm (11.4" × 4.6" × 1.3")  |
| Protective level     | IP65   |
| Installation         | Wall mounting  |
| Language             | English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil) |
| Platform             | Hik-ProConnect and HikCentral Professional   |

▪ **Available Model**

DS-K1T671TMFW

▪ **Dimension**

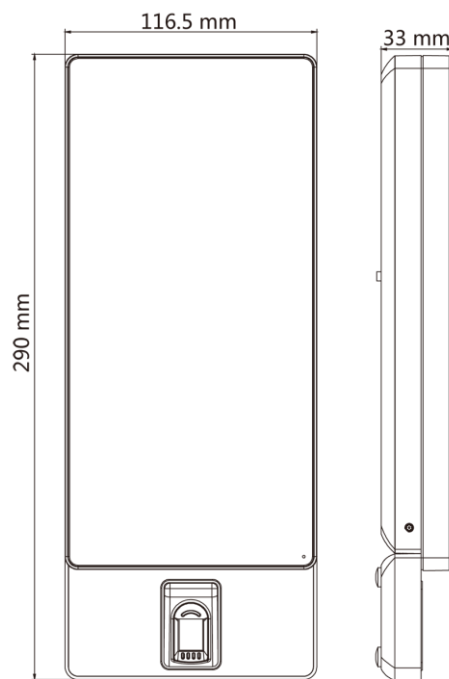

With Fingerprint Module

- Accessory
- Optional

| DS-KAB671-B<br>Stand Stick  | DS-KAB671-S<br>Protective Shield  | DS-KAB671-P1  |
|---|---|---|
|  |  |  |

Distributed by



## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com